



PGM A1

$U_w = 1,2 \text{ W/m}^2\text{K}$

GLAZING UNIT

$U_g = 1,0 \text{ W/m}^2\text{K}$

10 years


GUARANTEE
FOR WINDOWS

5 years

GUARANTEE
FOR WINDOWS




3 OPENING POSITIONS**

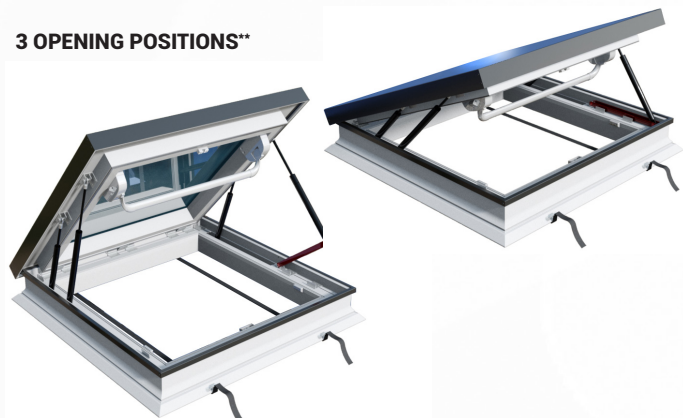

GLAZING

single chamber glazing unit
noble gas - argon
warm spacer
low emission coat
outer toughened pane
laminated inner pane



6H/16/44.2T


PROFILE TYPE

multi-chamber pvc profile in white colour,
resistant to influence of atmospheric factors,
filled with polyurethane foam

outside covering in RAL 7022



ROOF PITCH 2°-15°

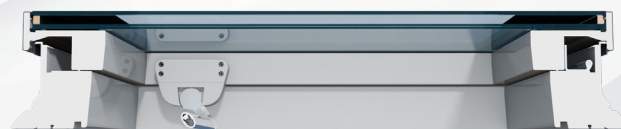

Standard dimensions:

size symbol	01P	02P	12P	03P	04P	05P	06P	07P	08P	09P	10P	11P
width x height [cm]	60×60	90×60	120×60	70×70	80×80	90×90	120×90	100×100	150×100	120×120	140×140	220×120
PGM A1		✓				✓	✓	✓	✓	✓		

*Details about the guarantee policy available at www.okpol.com

**During the low temperatures the intermediate opening position may decline due to reduce of gas expansion.